

## Lasting Values




### Humidity indicator to change the flexDryer

If the humidity indicator senses the moisture at the outlet of the flexdry, it will get color changed from blue to pink.that indicates that our flexdry should be changed.

## FlexDry

The FlexDryer's unique design reduces the relative humidity of the saturated compressed air to 0.5%.

- Handles upto 20 scfm.
- Built in dirt and oil aerosol filters.
- Replaces old technology at gun bulb filters.
- Significantly reduces paint defects from air line moisture.
- Mounts inline with air hose.
- Simple 2 minute installation. • Low investment.
- Humidity Indicator for easy tracking of desiccant performance.
- No Electricity input required, use and dispose.

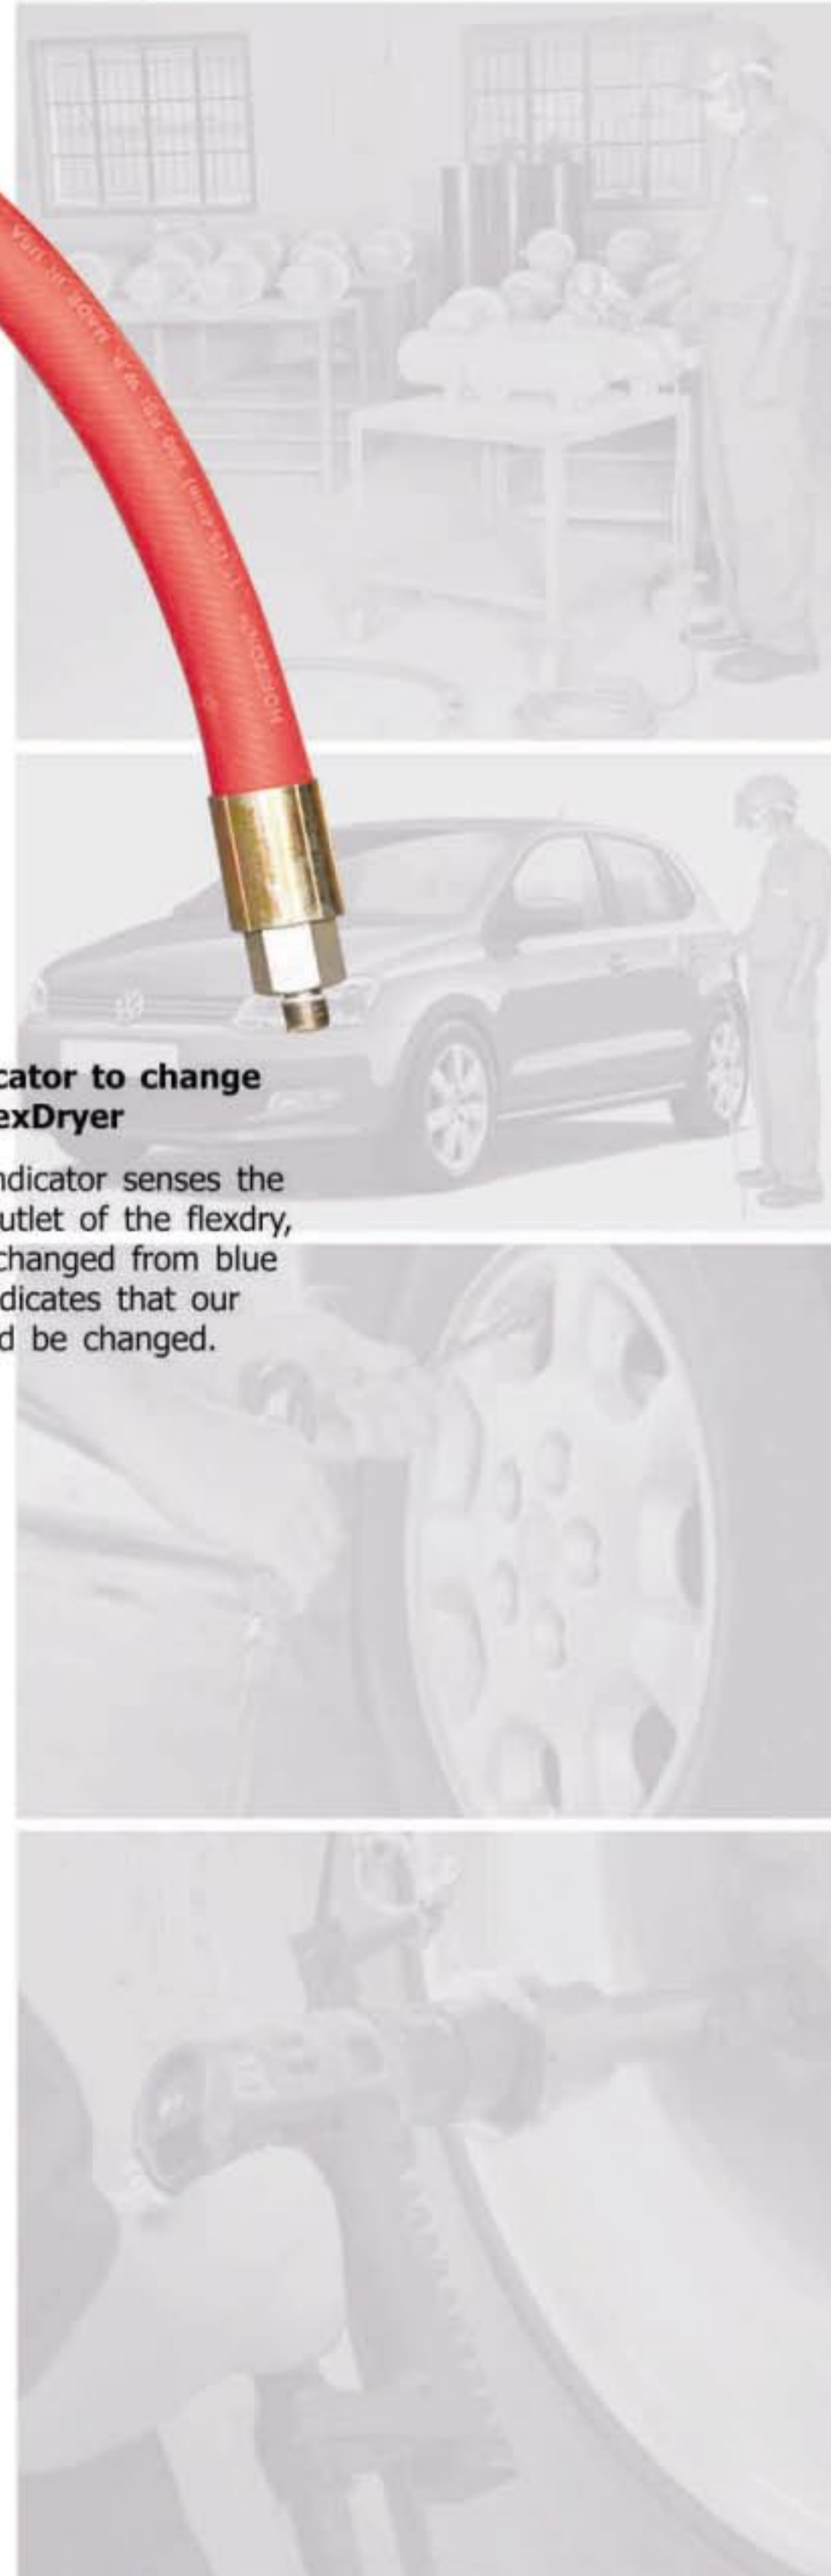

## Specifications

Flow capacity	Maximum pressure	Filter rating	Inlet & outlet connections	L x B x H
20 SCFM	200 PSI	1 micron	¼" NPT	35½" x 1¼" x 1¼"

## Applications

### Spray painting (Painting Garages)

Moisture will get behind paint film from failing or missing caulk, leaks in roof or wall systems or being too close to the ground.



### Tyre air filling stations (Car, Motorcycle, Bicycle)

Moisture in compressed air will expand in your tires when it heats up which will increase your tire pressure causing unsafe driving conditions, uneven wear.

### Pneumatic tools (Ratchet, Air Gun)

When the moisture in the pneumatic tools will lead to corrosion and property change of lubricant which causes the failure.



## Airjet International

No.575/1, Vivek Nagar, G.N.Mills Post, Coimbatore-641 029 India.  
Ph:+91-422-2646282,4050999, Email:sales@airjet.co.in, Website:www.airjet.co.in



### Our other Range of Products

- Time based Auto Drain Valve
- Level Sensing Auto Drain Valve
- Refrigeration Dryer
- Blower Reactivated Dryer
- Submicron Filter
- Oxygen & Nitrogen Generators
- Oil Water Separator

